fact[®]12







A message from Peter Thomas –

66

Peter Thomas

Owner & Chief Designer

"Our award-winning fact series of loudspeakers is aimed at the discerning ear and eye, and incorporates all of the design experience we've gained over years of producing high quality loudspeakers for the world's most respected music-makers, and creating internationally renowned HiFi designs. We are now very proud to introduce the **fact.12**, the next generation of **fact** designs.

"The sonic standard we set with the previous two-way fact models was extremely high, and raising the bar again has proven a huge challenge. In the **fact.12**, we have created a three-way speaker that goes further, providing greater power when required, while retaining the perfectly natural balance of the previous **fact** models. The **fact.12** conveys even more musical emotion from a design with all of the beautiful looks of the existing range. I am certain you will agree we have created a very special loudspeaker."




Marrying wood, fabric and chrome detailing, the **fact.12**'s elegant, remarkably compact design radiates quality and discernment as well as beautiful sound. And with its audiophile level controls for precise adjustment of high and low frequencies, it offers a perfect sound balance in any listening environment, integrating with a wide range of source equipment technically and aesthetically.



Design matters

The fact series is the product of PMC's passion for absolute sonic transparency, and the fact.12 builds on these foundations. As with all PMC designs, innovative research and development techniques play an important role, as do the collaborations forged with world-leading design partners such as Norwegian acoustic engineering specialist, SEAS, and standard-bearers of technical excellence including the UK's National Physical Laboratory. NPL has applied its unique laser-based acoustooptic mapping techniques to provide the most accurate 3D picture of how sound radiates from a loudspeaker, and the effect of cabinet, driver and crossover design on what we hear. These findings have been fed back into PMC's design process to ensure an even higher level of accuracy from the fact.12.

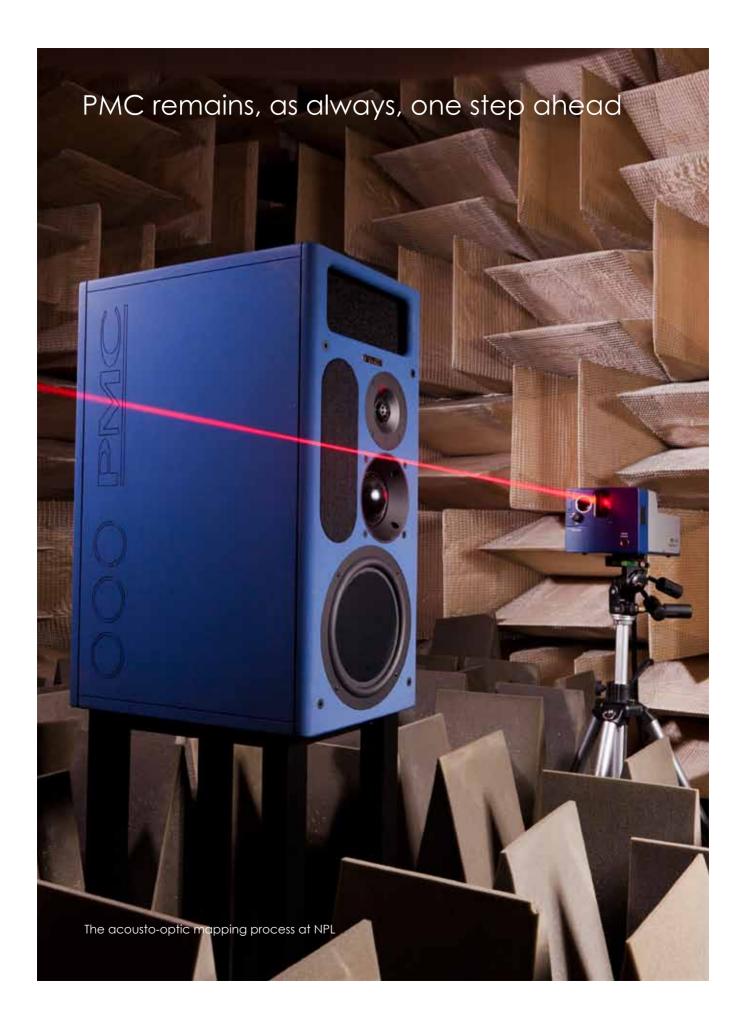






Advanced Transmission Line

All of our loudspeakers offer **A7L**™ bass loading technology, which provides the following advantages over ported speakers:

- More detailed, more natural as it was in the studio
- Full, rich sound at any volume level
- Deeper bass from a smaller cabinet
- Easy to drive with all amplifiers

The **fact.12** also features a new twin-vent, high-compression Advanced Transmission LineTM (**ATL**TM) bass-loading design, which provides deeper and richer extended bass despite the **fact.12**'s compact form, and delivers the most efficient combination ever of the drive unit and **ATL**TM.

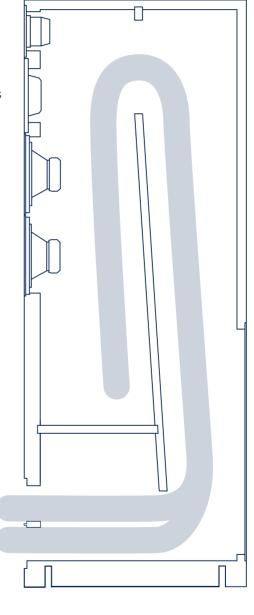

'No other technology provides such a huge, rich, room-filling sound'





Vocals that truly sing

Adding to PMC's long history of superbly engineered soft-dome drivers, the **fact.12**'s brand new mid-range unit is absolutely transparent, and incorporates design elements from the world-renowned PMC75 three-inch mid-range driver. The more compact 50mm hand-made fabric dome unit in the **fact.12** delivers the same tonal quality, wide dispersion, high power handling and ultra-low distortion expected by audiophiles worldwide.

The power to move

The super-long-throw bass driver, specifically designed for **fact.12**, is completely dedicated to low-frequency reproduction. It produces profound, well-controlled bass by combining a powerful magnet assembly with a sculpted rear plate that allows for immense linear excursions. The stiff yet ultra-light cone is specially coated to reduce unwanted resonance and is precisely profiled to increase its tensile strength. It also incorporates a laminated outer edge to further increase its stability and durability. The combination of PMC's **ATL**TM and this powerful driver creates low-frequency energy with agility and depth never seen before from a cabinet of these proportions.



Tuning to ensure a perfect sound

The **fact.12** resolves the complex issue of how to combine the differing sound signatures of room acoustics, cables and source equipment by allowing you to finely tune the speaker. Audiophilegrade switching, set into the **fact.12**'s solid aluminium rear panel, lets you subtly tailor the bass and treble response to create the perfect sound balance.

fact 12

000 EME


fact.12

000 PMC

No 000000

ce <u>⊠</u>

fact. 12 in Graphite poplar

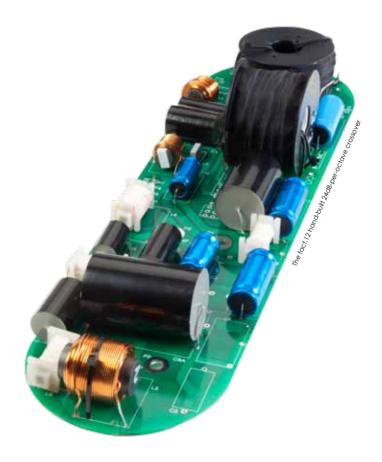

Ensuring perfect separation

The crossover is an essential precision component of any multi-driver loudspeaker, dividing the incoming amplified signal into the frequencies best suited to each of the drivers. All **fact** speakers feature sophisticated crossovers with extremely accurate filters mounted on military-grade fibre-glass boards, to ensure that the correct frequency range is routed only to the appropriate driver. Thick, pure copper tracks are used to connect the crossover components, optimising signal delivery, and only hand-selected components are used following extensive listening tests.

The role of the crossover is more imperative in the newest addition to the fact range than in any of the others: audio from the amplifier has to be correctly routed to the treble, mid-range and bass drivers. The **fact.12**'s three-way crossover is therefore a new design, incorporating PMC's custom-wound air core inductors for greater accuracy and lower distortion. For the first time, the fibre-glass board that holds the crossover components is also double-sided, with optimally specified components on both faces, in order to keep the critical signal paths to a minimum, and to avoid unwanted electromagnetic interaction.

Specifications

fact.12

Freq response 26Hz – 30kHz

Sensitivity 84dB 1w 1m

Effective ATL

(Advanced Transmission Line Length) 3.3m (11ft)

Impedance 8 Ohms

Drive Units LF 2 x fact 140mm (5.5") super long throw bass units

damped coating

MF 1 x **fact** 50mm (2.0") super clarity soft dome ferro-fluid cooled mid-range with machined aluminium dispersion plate

HF 1 x fact 19mm (0.75") high-res SONOMEX™ soft dome

ferro-fluid cooled with 34mm wide surround

Crossover Freq 400Hz, 4kHz

Input connectors 3 pairs 4mm PMC **Ag** terminals


Dimensions H 1110mm (43.7") + 25mm spikes

W 168mm (6.1") + 100mm (3.2") ingot feet

D 420mm (14.9") + 23mm (0.9") **Ag** terminals

Weight 26.0kg 57lbs ea.

Available finishes









White silk Rich

Rich walnut

Graphite poplar

Tiger ebony



43-45 Crawley Green Road Luton LU2 0AA UK T +44 (0)870 4441044 F +44 (0)870 4441045





The Professional Monitor Company Limited Reg No: 3328009